Air King Ventilation Products®

SPECIFICATIONS

SEV24SSH

RANGE HOODS

Barcelona® Collection, Seville™ Power Unit Insert

450 CFM/11.5 SONES @ 0.10" WG. HVI CERTIFIED 120 Volts, 2.8 amps, 60 hz.

- **Dimensions**
  Overall bottom projection - 10 15/16"
  Height - 10 1/4"
  Width: 19 7/16"
- **Hood Body**
  All metal cold rolled with stainless steel fascia.
- **Motor**
  3 speed, permanently split capacitor motor. Rated 120 volts, 60 hz., 2.8 amps.
- **Lighting**
  Two - Hi spot ES 16, 50 watt maximum halogen lights.
- **Ducting**
  Vertical ducting: 6" round duct adapter complete with polymetric back draft damper.
- **Blower Wheel**
  Dual inlet, electronically balanced polymetric centrifugal blower wheel, 5 27/32" width 59 paddles.
- **Cut Out Opening Size**
  Width - 18"
  Depth - 10"
- **Filters**
  Two - Model SVGF03, modular aluminum, dishwasher safe grease filters (included).
- **Available Finishes**
  Stainless Steel.

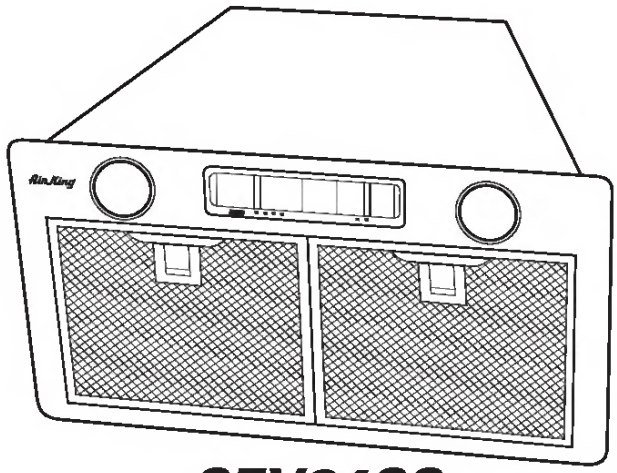

SEV24SS

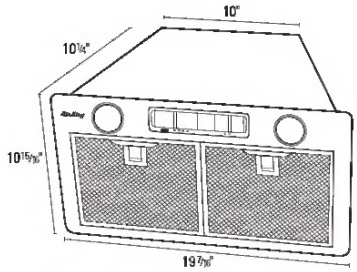

PERFORMANCE

	Static Pressure (inches of w.g.)								HVI Sones @ .1 SP	Fan Speed RPM	Power Watts
	0	0.1	0.125	0.25	0.375	0.5	0.75	1.0			
Air Flow - CFM	460	450	447	434	422	411	389	366	11.5	2650	440

PROJECT		ARCHITECT	
LOCATION		ENGINEER	
CONTRACTOR		SUBMITTED BY	DATE

FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS

c UL us

2100 HVI CERTIFIED™

U.S.: 820 Lincoln Drive
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada: 110 Glidden Road
Brampton, Ontario L6T 2J3
Tel: (905) 456-2033
Fax: (905) 456-1015

Downloaded from www.Manualslib.com manuals search engine